


Flat Cable Cores

GFPC Series



Nickel-free: 1-piece type

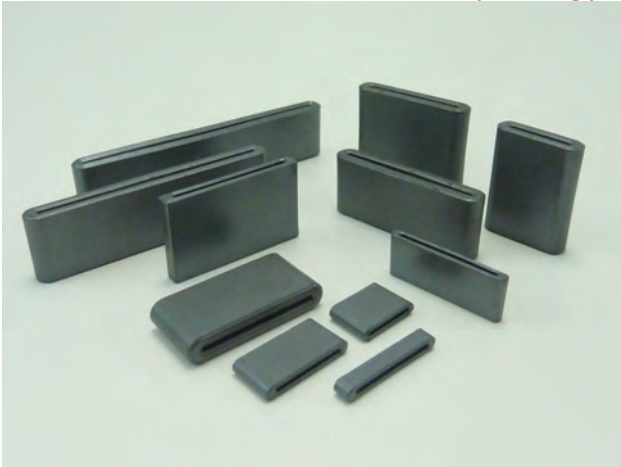

Noise suppression for ribbon cables

■ Dimensions

Part Number	A	B	C	D	E	Impedance Ω / 100MHz (1 turn)
GFPC-11-8-2 ①	11.0	0.7	2.3	8.0	9.0	≥ 25
GFPC-16-8-2 ①	15.5	0.7	2.3	8.0	12.0	≥ 25
GFPC-18-3-2 ①	18.0	0.7	2.3	3.0	14.5	≥ 20
GFPC-18-8-2 ①	18.0	0.7	2.3	8.0	14.5	≥ 25
GFPC-22-8-2 ①	21.5	0.7	2.3	8.0	18.0	≥ 25
GFPC-16-5-3 ①	16.0	0.5	3.0	5.0	11.5	≥ 20
GFPC-16-8-3 ①	16.0	0.5	3.0	8.0	11.5	≥ 25
GFPC-24-12-3 ②	23.3	0.9	3.0	12.0	20.0	≥ 30
GFPC-25-10-3 ②	25.5	0.8	3.0	10.0	21.5	≥ 25
GFPC-25-15-3 ②	25.5	0.8	3.0	15.0	21.5	≥ 35
GFPC-31-12-3 ②	31.0	1.0	3.0	12.0	27.0	≥ 30
GFPC-16-12 ①	16.0	0.5	5.0	12.0	11.5	≥ 45
GFPC-16-20 ①	16.0	0.8	5.0	20.0	11.5	≥ 60
GFPC-25-12 ①	24.5	0.5	5.0	12.0	20.0	≥ 35
GFPC-25-20 ①	24.5	0.5	5.0	20.0	20.0	≥ 50
GFPC-31-12 ①	31.0	0.5	5.0	12.0	27.0	≥ 40
GFPC-46-12 ①	46.0	0.5	5.0	12.0	41.5	≥ 40
GFPC-56-12 ①	56.2	0.5	5.0	12.0	52.4	≥ 35

Profile: ① & ②

Material: Soft Ferrite

